



Read and follow these instructions carefully before proceeding with installation. Do not deviate from wiring instructions. Incorrect wiring could cause an electrical short with possible fire. Make sure that wiring is dressed away from moving or hot engine components. If wires run thru drilled holes, protect the wires using grommets and de-burring the holes. Always disconnect battery before making electrical connections. Before re-connecting battery be sure all connections are properly made and soldered.

This instrument is designed to operate on 8 V DC to 32 V DC systems. Hourmeters can be advanced on an actual time basis within the operating voltage range. Hourmeters can not be reset to zero hours.

Hourmeters read maximum 99999.9 hours.


Illumination is not available.

Right hand indicator wheel will index every 3.6 seconds to indicate the meter is counting.

Various standard making organization have established guide lines for wiring colors. Those applicable to your installation should be followed.

Included


Inclus
Mit eingeschlossen
Inclusi
Includo

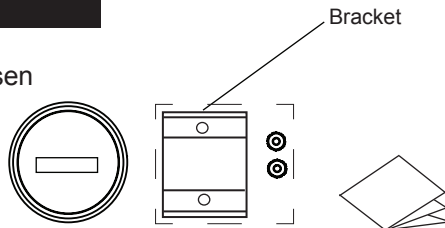

Disconnect Battery


Débrancher la batterie
Batterie abklemmen

Scollegare la batteria
Desconecte la batería



Install Gauge in dash.

Installez la jauge dans le tableau de bord.
Messinstrument ins Armaturenbrett einbauen.
Installare lo strumento di misurazione nel quadro degli strumenti.
Instale el medidor en el tablero de instrumentos

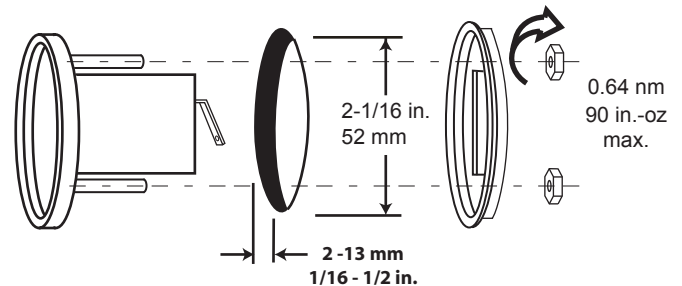


A		B		Ø	
52.5 mm	2 1/16 in.	56.3 mm	2.22 in.	54 mm	2 1/8 in.
86 mm	3 3/8 in.	87.3 mm	3.44 in.	87 mm	3 13/32 in.
110 mm	4 9/32 in.	117.3 mm	4.62 in.	111 mm	4.3/8 in.

Select location	Check for clearance	Drill Hole
Choisir l'emplacement	Vérifiez le dégagement	Forer le trou
Platzierung auswählen	Auf Abstand achten	Loch bohren
Scegliere la posizione	Controllare lo spazio disponibile	Fare un foro
Escoja la ubicación	Verifique el espacio libre	Taladre el orificio



Install Gauge in dash.

Installez la jauge dans le tableau de bord.
Messinstrument ins Armaturenbrett einbauen.
Installare lo strumento di misurazione nel quadro degli strumenti.
Instale el medidor en el tablero de instrumentos

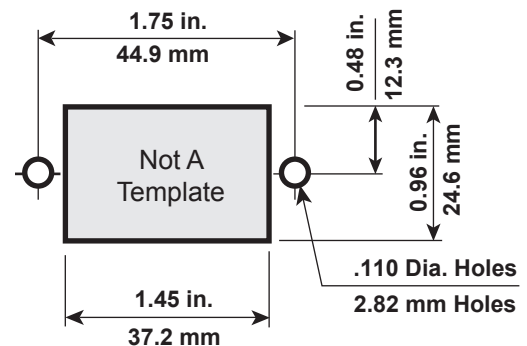


Wiring

Installation électrique
Verdrahten
Cablaggio
Alambrado

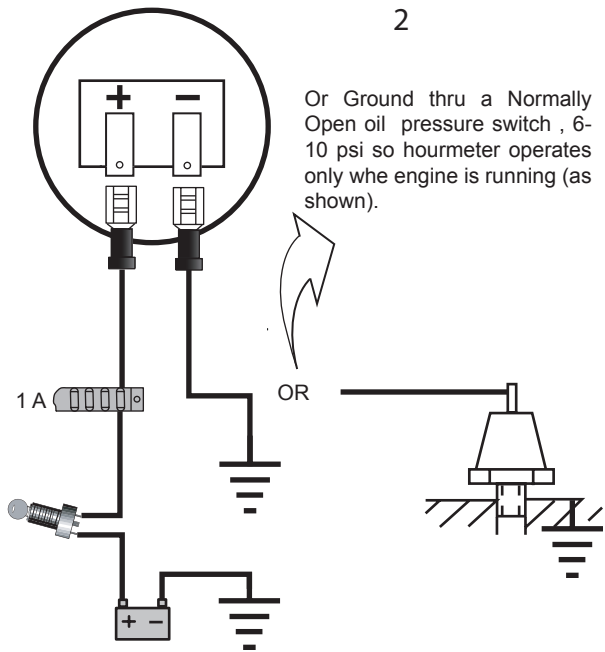

Reconnect Battery

Rebrancher la batterie
Batterie wieder anschließen.
Ricollegare la batteria
Conecte de nuevo la batería



Trouble Shooting


Résolution des problèmes
Fehlerbehebung
Ricerca e Soluzione di Problemi e Guasti
Localización y solución de problemas

Be certain all connections are correct.

Be certain all connections are clean and tight.

Be certain the fuse is not blown.

You should hear the hourmeter indexing every 3.6 seconds. If you hear the sound but the index wheel is not rotating, try loosening the mounting nuts a bit to assure it is not causing a binding.



Hours already entered on the hourmeter CAN NOT be removed.

Hours can be added by connecting to a battery and running until the desired hours are achieved.

Veethree Electronics & Marine, LLC
2420 Trailmate Drive
Sarasota Florida, 34243
Telephone: 941-538-7775
email: techservice@veethree.com